

EXPRESS MAIL LABEL NO.:

EL804518781US 010 Rec'd PCT/PTO 17 JAN 2002

DATE: January 17, 2002

FORM PTO 1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER OYJALO-010
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/031473
INTERNATIONAL APPLICATION NO. PCT/FI00/00634	INTERNATIONAL FILING DATES 10 July 2000	PRIORITY DATE CLAIMED 21 July 1999	
TITLE OF INVENTION PULP WASHING METHOD AND PLANT			
APPLICANT(S) FOR DO/EO/US Pertti Haapamäki			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing 35 U.S.C. 371 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371 (f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)). <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). (Executed) 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 			
Items 11 to 20 below concern document(s) or information included:			
<ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. w/PTO-1449, 6 references 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input checked="" type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: Copy of International Preliminary Examination Report, Three (3) Sheets of Formal Drawings 			

SIGNATURE: _____

SIGNATURE: Arnold H. Krumboltz

NAME _____

25,428

REGISTRATION NUMBER

3/priv

PULP WASHING METHOD AND PLANT

Field of the invention

- 5 This invention relates to the field of pulp washing technology. Objects of the invention are a method of washing pulp by means of a gradually diluted wash filtrate recovered at an earlier stage of the washing, and a plant for carrying out the method.

Background art

- 10 The washing of pulp – the removal of dissolved, undesired components from the pulp following various delignification stages – is still one of the most difficult operations even in the field of the most recent pulping technology, calling for continuous development of equipment and improvement of methods within the washing processes throughout the fibre line.

15 There are many kinds of washers in use, drum and Fourdrinier wire washers, presses and diffusers operating at various pressures.

- 20 The continuous aim being, for both economical and environmental reasons, to reduce the amount of water consumed per pulp ton, multistage washing methods and plants have been developed wherein the wash filtrate is re-circulated through the pulp at a process stage at which the pulp is less pure than the relevant filtrate. For example, in Finnish patent application 980481, a method of re-circulating washer filtrates is described, which method can
- 25 be applied to a multistage drum washer. The pulp web to be washed is divided into zones from which the filtrate fractions are individually collected and returned in the counterflow direction to serve as washing liquids in less pure zones. Multistage washing methods have been developed also for diffusers, as described in U.S. Patent 4,705,600. A multistage wash is particularly difficult to carry out in pressure diffusers, as it is hard to avoid chan-
- 30 nelling in the pulp and intermixing of the filtrate fractions collected. In U.S. Patent 5,567,262, a two-stage pressure diffuser is disclosed in which the filter unit is divided into two compartments and in which the wash filtrate of the less pure end is returned counter-currently. Further, U.S. Patent 5,482,594 discloses a pulp washer operating at elevated pressure and having two main stages, in which the batch of pulp slurry is first dewatered

10031473-011702

on a wire table and subsequently carried to a washing position on the table. The recirculation of wash filtrates is also described, wherein filtrate fractions having different concentrations are collected in individual containers and wherein the number of washing stages can be five or more, depending on the number of collecting vessels and on the recirculation order.

Disclosure of the invention

Brief description

The method according to claim 1 has now been invented for improving the efficiency of multistage washing, wherein the initial washing of a given batch of pulp is performed by means of a steplessly diluted, recovered filtrate fraction originating from the preceding batch of pulp, prior to the final washing of the pulp batch using available washing water or filtrate coming from the process. In the method, the recovered fraction filtrate is kept stored in such a way, that the concentration gradient of the dissolved substances is maintained until the fraction is used for washing the following batch of pulp, which is not possible in the conventional intermediate fraction tanks in any type of prior art multistage wash. A further object of the invention is a pulp washing plant wherein the method according to the invention is carried out in a laboratory-scale test washer and applied to industrial pulp washing plant solutions.

Detailed description

Figure 1 shows a laboratory-scale test plant according to the invention; figure 2 is a schematic view of an industry-scale washing plant according to the invention; figure 3 is a partial view of the upper part of figure 2 and shows another embodiment of the washing plant according to figure 2, in which the treatment of the batch of pulp to be washed is carried out in an alternative manner.

The basic functional principle of the invention will be explained in more detail in the following, with reference to the accompanying drawing, wherein figure 1 shows the principle of a testing plant according to the invention. The main parts of the plant are a pulp washing

cylinder 5, filtrate holding pipes 1 and 1A and a collecting tank 19 for the leaving filtrate liquor and a control unit 23 for the washing water.

5 A batch of pulp 27 to be washed is formed in the cylinder 5 as follows: the threaded fastening ring 7 of the cylinder is unscrewed and the washing water distributor head 6 comprising a screen is removed from the top of the cylinder. Valve 13 is closed and three-way valve 14 is opened to wash filtrate outlet pipe 20. A desired amount of pulp is poured into the cylinder 5, simultaneously lowering the piston 8 by opening and closing a valve 25 located on the hydraulic water discharge side of the cylinder. The distributor head 6 is put
10 back in place and valve 11 is opened. The coupling 15 of overflow pipe 17 is fitted to coupling 12 of the washing water distributor head. A stopper 10 for limiting piston movement is placed on a circular plate fixed to piston rod 9, below the cylinder. The height of the stopper determines the upper position of the piston, which ensures that a pulp mat 27 of a constant thickness is always formed between the screen faces. The free air is removed from
15 the cylinder, from above the pulp, by opening and closing a valve 26 located on the hydraulic water feeding side and, consequently, by raising the pulp surface by means of piston 8 to lie against the screen face of the distributor head 6 and further, until filtrate starts to flow into overflow pipe 17. The valve 11 is closed and the overflow coupling 15 is removed from coupling 12 of the distributor head. Valve 13 is opened. Raising the piston is continued by opening valve 26, until piston movement limiting stopper 10 engages. Valves
20 26 and 13 are closed. A pulp mat 27 has been formed and the mother liquor of the pulp mat formation has been transferred to filtrate liquor collecting tank 19.

It is assumed, that at this stage holding pipe 1A is filled with fraction filtrate obtained from
25 the washing of the preceding batch of pulp. Holding pipe 1A is connected to washing water coupling 2C by means of a coupling 2A at its lower end, and to coupling 12 of the washing water distributor head by means of a coupling 3A at its upper end. All the couplings used in the test plant are hydraulic quick couplings comprising locking spindles. In order to maintain the concentration gradient of the filtrate fraction led from the bottom of the pulp
30 mat 27 during the short period of storage, the filtrate holding pipe 1A is made of thin, pressure-proof and preferably transparent pipe having an inside diameter of 10 to 15 mm, the inside diameter of cylinder 5 being 100 to 150 mm. The pipe is mounted on a supporting structure having an outside diameter of 150 to 250 mm as a spiral of such length that it can hold an amount of fraction filtrate at least 1 to 2 two times larger relative to the basic

amount of liquor in the pulp cake. This results in a washing efficiency 2 to 4 times greater compared with a normal single stage wash. The filtrate to be displaced has the highest concentration of dissolved substances at the beginning of the wash, after which the concentration of the solution gradually declines as washing proceeds. Thus, the filtrate portion having the lowest concentration lies in the bottom part of holding pipe 1A, in front of the washing water coupling 2A, and the filtrate amount having the highest concentration has moved, during the filling of the holding pipe, to the upper end thereof, closer to the pulp mat 27 to be washed. The fraction filtrate holding vessel 1, which is identical to 1A as far as dimensions and fittings are concerned, is empty and connected to a filtrate liquor inlet coupling 2B by means of a coupling 2 at its lower end and is in ventilating connection with the overflow pipe 18 via couplings 3 and 16 and an open valve 28.

The washing of the pulp mat is performed as follows: Valves 11 and 13 and the washing water control valve 22 are opened, and the unit 23 for controlling the amount of washing water is started. If the aim is to perform the washing in a pressurised state and, consequently, to affect the behaviour of the air in the system, the control unit 23 is allowed to control valve 13 instead of valve 22. However, valve 13 is not opened and washing is not started until the desired pressure has been reached in the washing chamber of the pulp mat 27 with the aid of the pressurised washing water. Starting to move, the washing water pushes the fraction filtrate stored in holding pipe 1A ahead of it, through the pulp mat 27, with the result that the most concentrated fraction filtrate thereof displaces the most concentrated mother liquor from the mat directly into the wash filtrate tank 19 through pipe 20. The control unit 23 estimates how much filtrate is discharged into the wash filtrate tank and indicates when the desired volume is reached. At this stage, three-way valve 14 is immediately turned into its second position, so that the wash filtrate required in the continuous fraction wash is directed into fraction holding pipe 1, beginning to fill it. After the fraction wash filtrate has run out, the washing of the pulp mat continues uninterrupted using the regular washing water available, until unit 23 for controlling the amount of washing water sends an impulse to close washing water valve 22. Valve 22 is closed immediately, as well as valves 11 and 13. The shifting of wash filtrate flow destination from wash filtrate collecting tank 19 to fraction pipe 1 using three-way valve 14 is timed in the control unit in such a way, that the smallest possible amount of fraction filtrate (the most concentrated filtrate, however) is carried directly into collecting tank 19 through overflow pipe 18. If the washing is performed in a pressurised state, it is possible to increase the pressure

in fraction vessel 1 by choking ventilation valve 28, preventing the hot filtrates from swelling in the fraction vessel. Couplings 2 and 3 of holding pipe 1, which is full of washing water, are unconnected. Coupling 3A is disconnected from coupling 12 of the distributor head and it is connected to coupling 16 of ventilation pipe 18. Valve 24 is opened and the washing water is allowed to drain from holding pipe 1A. The piston movement limiting stopper 10 is removed, the fastening ring 7 is unscrewed and the washing water distributor head 6 and the pulp mat 27 are pushed out of the cylinder with piston 8. Drain valve 4 is opened and the filtrate stored in the pipe system is emptied into container 21. The filtrate is recovered and the amounts of chemicals therein are taken into account when calculating the washing factors. The three-way valve 14 is turned toward pipe 20. The coupling 2A of tubular vessel 1A, which is drained of washing water, is disconnected from washing water coupling 2C and shifted to coupling 2B. The unconnected coupling 2 of the lower end of holding pipe 1 and coupling 3 of the upper end thereof are connected to washing water coupling 2C and to coupling 12 of the washing water distributor head, respectively.

A new batch of pulp can now be washed in the testing plant. The operations are the same as described above except for the filtrate holding pipes 1 and 1A that always have reversed functions after each washing of a new batch of pulp.

When studying fractional washing by means of the test washer, it was observed that to reach an acceptable equilibrium for the liquor concentrations in the fraction filtrate pipe, the washing operation described above must be performed 5 to 8 times in succession using the same amounts of pulp and washing water, the testing conditions being as identical as possible.

Figure 2 shows the principle of an industry-scale plant according to the invention. The main parts of the plant are pulp washer 29, filtrate tanks 30 and 30A corresponding to the holding pipes 1 and 1A of the testing plant described above, and tanks for the leaving filtrate liquor 39 and for the washing water 38.

When the operation is started, tank 30A is full of filtrate obtained from the washing of a pulp batch of a given size. In order to maintain the concentration gradient of the filtrate fraction pumped out of the bottom of the pulp batch 31, tank 30A is of a cellular design; thus, vertical partition walls divide the tank into a plurality of narrow cells extending in the

- direction in which the flow passes through the tank, preferably providing a honeycomb-shaped cross section. The filtrate first displaced from the batch of pulp to be washed has the highest concentration of dissolved substances. This spreads over the whole width of the tank bottom, from where the filtrate rises into all empty cells. Any small differences in
- 5 flow rate that may occur at the beginning of the filling disappear immediately due to gravity, and as the liquid level rises, the filtrate fractionates in the tank, in the same way over the whole width all the way to the top end. Thus, when tank 30A is full, the least concentrated part will lie in the lowest part thereof, above the inlet connection, and the most concentrated part of the filtrate in the upper part, below the outlet connection. The filling of
- 10 the tank from below upward enhances the separation of air from the filtrate, and it can be removed from above the liquid surface of the tank in the filtrate overflow stage at the latest. When the operation cycle starts, tank 30 is empty. A new batch of pulp 31 to be washed has been formed in washer 29. All valves are closed.
- 15 Washing of the pulp 31 is started by a pre-wash. The pumps 32 and 33 start. The valves 34A, 35, 36 and 37A open to their set values. Washing water flows from the tank 38 into the lower part of the tank 30A, pushing the filtrate fraction in the tank ahead of it. The distribution of the displacement liquid evenly over the whole cross-sectional area of the tank having a large diameter can be ensured using a separate washing water inlet pipe system
- 20 and choke nozzles, which are not shown in figure 2. The filtrate leaving via the upper end of the fraction tank and having the highest concentration of dissolved substances penetrates into the pulp layer 31, displacing most of the mother liquor into a filtrate liquor tank 39 through a valve 36. When a predefined amount, for example 1.2 times the liquid volume of the pulp layer, has been displaced, valve 36 closes. Valve 40 opens and the after-washing
- 25 stage begins.

The pumping of washing water from tank 38 into tank 30A continues. The filtrate leaving the pulp is stored in tank 30, which is identical to tank 30A. When tank 30 becomes full, the flow can continue, for a given time, as overflow into an air separation and overflow

30 cyclone 41 through valve 35 and further into filtrate liquor tank 39.

Once the washing is completed, the valves 37A, 34A, 35 and 40 close and the pumps 32 and 33 stop. The ventilation valve 35A and the drain valve 43A open, with the result that the unused washing water flows from tank 30A back into the washing water tank 38. Valve

43A closes. The washed pulp layer 31 leaves the washer 29. Valve 42 opens and the last, purest filtrate fraction is led back into the washing water pipe system, to the front of the pump 33 to be used as washing water, as the first litres of the flow in the following wash. Valve 42 closes.

A new layer of pulp 31 is forming in the washing chamber of the washer 29 and a new washing cycle can begin. The operation is identical to the washing operation described above except for the fact that the function of tanks 30 and 30A and their corresponding valves have been reversed.

In figure 2, the washer 29 is shown as an apparatus in which the pulp layer moves in the horizontal plane, as in a Fourdrinier wire washer. The apparatus described in U.S Patent 5,482,594 mentioned above is an example of such a device. In this case, the washing chamber may have a screen face only at the bottom. The invention can also be applied to batch-type twin wire precipitation devices. Furthermore, a plant using the technique according to the invention can be provided with a vertical pulp path by applying, for example, the technology described in U.S Patent 5,567,262. Figure 3 is a schematic view of the upper part of such a plant; in other respects and as far as reference numbers are concerned, the figure is identical to the upper part of figure 2. The method can, for example, be applied to a continuous process by using prior art methods according to the diffuser principle, in which case the periodically operating fractional washing is completed during the time while

the assembly composed of the washing water distributor screen and the pulp mat washing screen run parallel along the main pulp flow in the diffuser.

A new unwashed batch of pulp is generated between the washing water distributor screen and the washing screen when the screen package is jolted back to its initial position.

The production capacity of the plant according to the invention can be estimated as follows:

$$P = \frac{v \cdot \eta \cdot A \cdot D \cdot 8.64}{S \cdot 100 - c_m / c_m + (100 - c_{out}) / c_{out} + DF}$$

wherein

P = production capacity, ODT/24h

v = speed of the wash filtrate, cm/s determined using the testing plant according to figure

5 1, for example

et = effective washing time of a single washing cycle as a percentage

A = filtration area available for the wash, m^2

D = density of the washing liquid, t/m^3

S = number of mother liquor displacements at the fractional wash stage

10 c_m = pulp consistency in the mat, %

c_{out} = consistency of the leaving, washed pulp, %

DF = dilution factor of the wash, t/ODT

If the values are $v = 0,7$, $et = 80$, $D = 1$, $S = 1,5$, $c_m = c_{out} = 10$ and $DF = 2,5$, for example, a

15 24-hour production capacity of approximately 19,4 ODT per square meter is achieved.

202110-2743001

Claims

1. A pulp washing method, characterised in the following repeated steps:
- a) first volume of liquid is displaced from a batch of pulp by means of a washing liquid and removed from the washing process;
 - b) wash filtrate is displaced from the pulp by means of a second volume of washing liquid, said wash filtrate being at least partly recovered into a fraction holding vessel, maintaining a concentration gradient within the filtrate in the holding vessel;
 - c) the washed batch of pulp is replaced by an unwashed batch of pulp;
 - d) the concentration-gradient wash filtrate recovered in step b is used to displace liquid from the unwashed batch of pulp according to step a.
2. A method as defined in claim 1, characterised in that the recovered wash filtrate is displaced from the holding vessel by washing water, and the washing water remaining in the holding vessel after the washing stage is returned to the washing water tank to be used in the displacement of subsequent filtrates.
3. A pulp washing plant, characterised in that it comprises a pulp washing chamber, means for bringing pulp into the washing chamber and for removing it therefrom and at least two vessels for receiving and holding wash filtrate, the structure of which vessels has been adapted to maintain the concentration gradient of the wash filtrate between inlet and outlet connections of the vessel, and means for displacing wash filtrate from the vessels into the pulp washing chamber.
4. A plant as defined in claim 3, characterised in that the vessel comprises a pipe or a hose.
5. A plant as defined in claim 3, characterised in that the inside structure of the vessels is a cell structure comprising parallel channels extending in the flow-through direction of the tank.
6. A plant as defined in any claim 3 to 5, characterised in that the vessels are filled via their bottom, and ventilation and overflow are provided via the top of the tank.

1/3

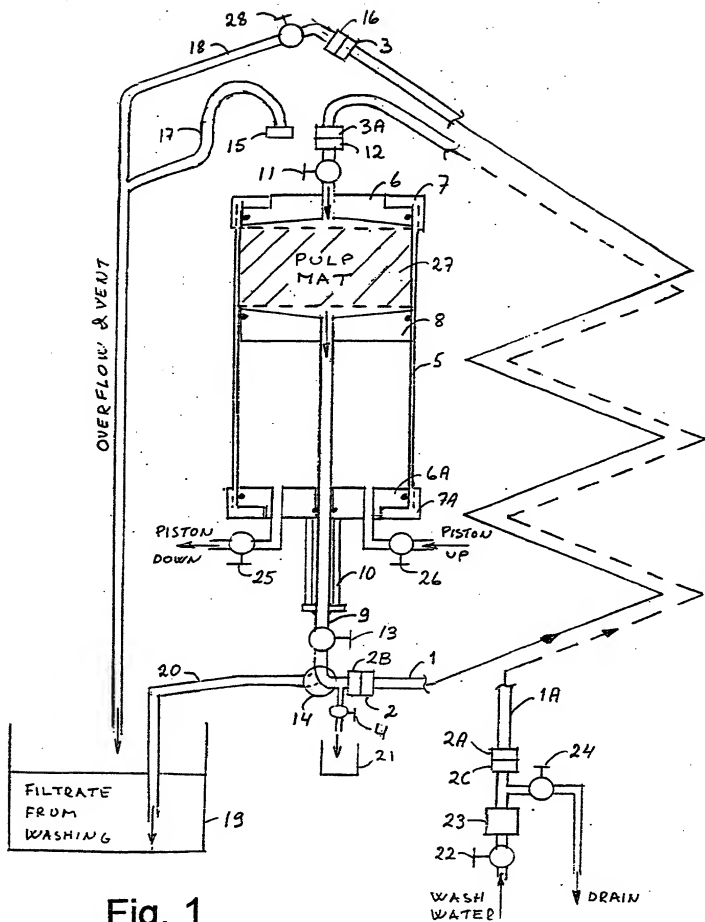


Fig. 1

2/3

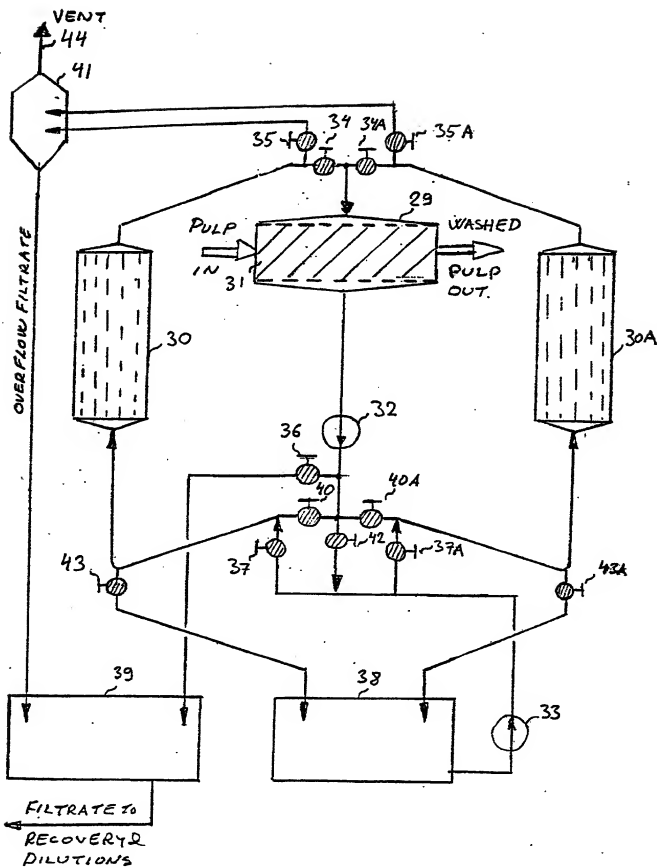


Fig. 2

10031473-011700

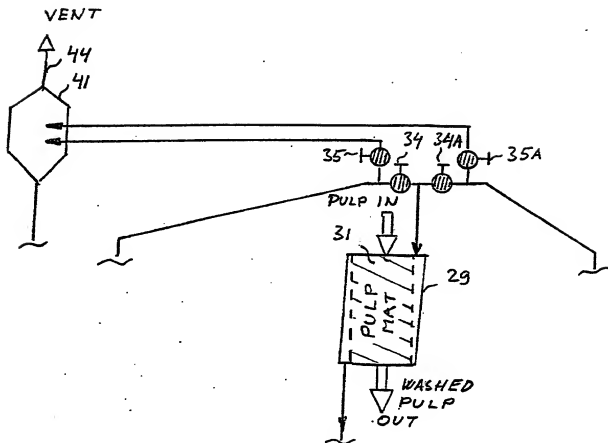


Fig. 3

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (03-01)

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)		Attorney Docket Number	OYJALO-010
		First Named Inventor	Perti Haapamäki
COMPLETE IF KNOWN			
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)		Application Number	Not Yet Assigned
		Filing Date	
		Group Art Unit	N/A
		Examiner Name	Not Yet Assigned

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PULP WASHING METHOD AND PLANT

(Title of the Invention)

the specification of which

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY) 07/10/2000 as United States Application Number or PCT International

Application No. PCT/FI00/00634 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
991631	FI	07/21/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

Please type a plus sign (+) inside this box



Approved for use through 10/31/2002 OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Customer Number 005530

Direct all correspondence to:

☐ Customer Number
or Bar Code LabelOR ☐ Correspondence address below**00530**

PATENT TRADEMARK OFFICE

Name

Address

City

State

ZIP

Country

Telephone

Fax

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name

(first and middle (if any)) Pertti

Family Name

or Surname HAAPAMÄKIInventor's
SignatureDate 11 January 2002Residence: City MontrealState PQCountry CANADACitizenship FinnishMailing
Address:259 Markham Place, BeaconsfieldCity MontrealState PQZIP H9W 2B6Country CANADA

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name

(first and middle (if any))

Family Name

or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Mailing
Address:

City

State

ZIP

Country

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.